**PRODUCT FEATURES:**

Single handle sink faucet.  
Mechanical stop system to operated the lever handle.  
Single control cartridge 35 mm.  
High hardness ceramic discs assures and extend cartridge lifetime without leakage.  
Easy installation and maintenance.  
This product can be used to help achieve water efficiency goals as well as gaining USGBC LEED points.

**MATERIALS:**

Solid brass, for durability and reliability.  
Finishes with ultra high resistance to corrosion and tarnishing.

**ACCESORIES:**

5/64" allen wrench.

**INSTALLATION:**

½" - 14 NPSM connection.

**OPERATION:**

To open the water flow lift the lever and to close push the lever. To adjust the water temperature, turn left for hot and turn right for cold.




**CODES AND STANDARDS:**

ASME A112.18.1 / CSA B125.1-2018,  
Plumbing Supply Fittings  
NSF/ANSI 61/ANSI-2020, Drinking Water  
System Components - Health Effects  
NSF/ANSI 372-2016, Drinking Water Systems  
Components - Lead Content  
EPA Water Sense High-Efficiency Lavatory Faucet  
CEC/DOE-ENERGY POLICY ACT 1992

**FINISHINGS:**

BB	PVD Brushed Brass
BW	Bright White
MB	Matte Black
PC	Polished Chrome
PCO	PVD Polished Copper
PG	PVD Polished Gold
PGH	PVD Polished Graphite
PN	PVD Polished Nickel
RG	PVD Rose Gold
SC	PVD Satin Copper
SGH	PVD Satin Graphite
SN	PVD Satin Nickel
SRG	PVD Satin Rose Gold

Estimated Dimensions Dim. inch. [mm]

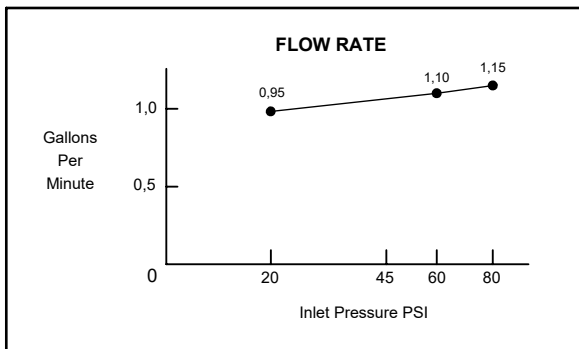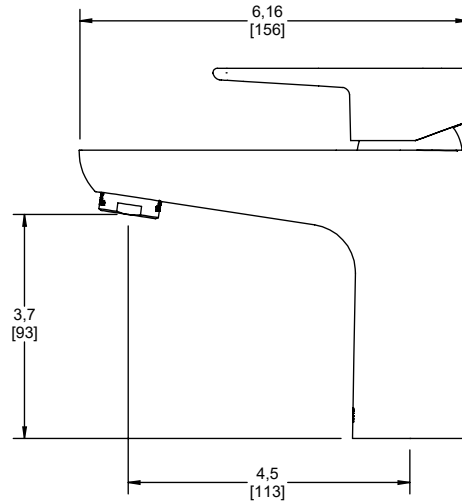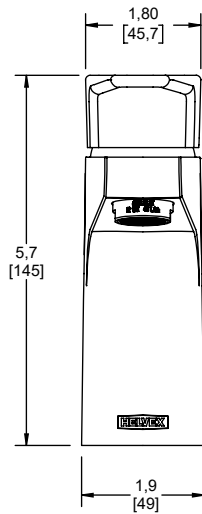

**WORKING PRESSURE:**

Pmin.= 20 PSI  
Pmax.= 80 PSI

**MAXIMUM FLOW RATE:**

1,2 GPM

**NOTES:**

Install the product according to the Installation Guide.