**PRODUCT FEATURES:**

Hand shower with anti-limescale system and sliding bar.
Easy to install.
Prevents hard water deposits, easy to clean in seconds, with the touch of a finger.
This product can be used to help achieve water efficiency goals as well as gaining USGBC LEED points.

MATERIALS:

Solid brass and ABS plastic, for durability and reliability.
Finishes with ultra high resistance to corrosion and tarnishing.

ACCESORIES:

1/2" - 14 NPSM X 1/2" - 14 NPSM X 59" Hose.
Wall supply.

INSTALLATION:

Wall mount.
1/2" - 14 NPT connection.




CODES AND STANDARDS:

ASME A112.18.1 / CSA B125.1-2018,
Plumbing Supply Fittings
NSF/ANSI 61/ANSI-2020, Drinking Water
System Componets - Health Effects
NSF/ANSI 372-2016, Drinking water Systems
Componets - Lead Content
EPA WaterSense Specifications for Showerheads

FINISHINGS:

BB PVD Brushed Brass
BW Bright White
MB Matte Black
PC Polished Chrome
PCO PVD Polished Copper
PG PVD Polished Gold
PGH PVD Polished Graphite
PN PVD Polished Nickel
RG PVD Rose Gold
SC PVD Satin Copper
SGH PVD Satin Graphite
SN PVD Satin Nickel
SRG PVD Satin Rose Gold

Estimated Dimensions Dim. inch. [mm]

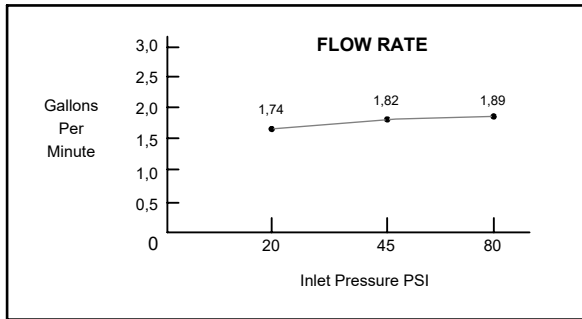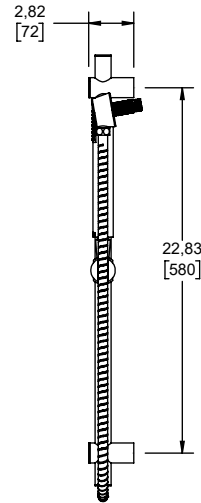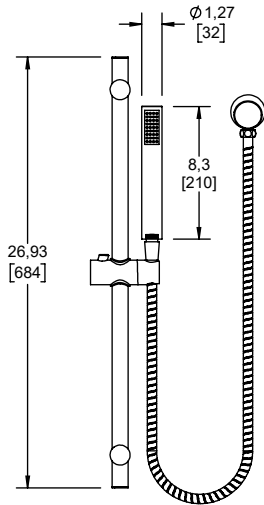

WORKING PRESSURE:

Pmin.= 20 PSI
 Pmax.= 80 PSI

MAXIMUM FLOW RATE:

1,89 GPM

NOTES:

Install the product according to the Installation Guide.